



The Terex Finlay J-1480 incorporates the Terex Jaques JW55 single toggle jaw crusher which boasts a throughput capacity up to 750mtpd depending on application and material. The machine is available with the optional direct drive which offers improved fuel efficiency and greater power utilisation or the standard hydrostatic drive which offers reversible operation for clearing blockages and for use in demolition applications. The large 10m³ hopper has hydraulically folding sides and hydraulic wedge clamp system providing faster machine set up time. The machine features a vibrating pan feeder and an aggressive independently driven pre-screen which provides optimum separation of dirt, fines and difficult materials.


Features:

- ▶ Terex Jaques Jaw with fully hydraulic adjustable closed side setting.
- ▶ Hydrostatic & Direct drive systems with advanced electronic control system.
- ▶ 10m³ (13yd³) hopper capacity. Optional hopper side extensions are available.
- ▶ Independent VGF feeder and Pre-Screen.
- ▶ Selectable discharge to by-pass conveyor or main conveyor.

Transport Dimensions



Working Dimensions

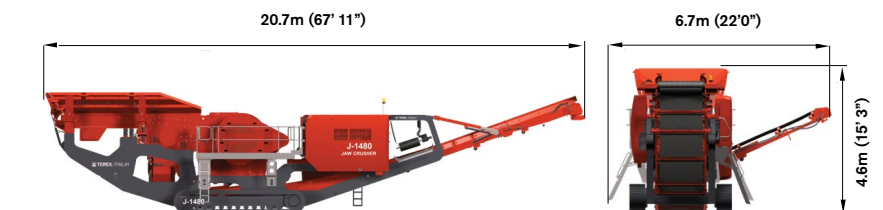


Maximum Plant Capacity:

Tph**
750

Stph**
827

**Material is based on Limestone with bulk density 1.6T/m³. Where available optional Pre-screen is used. Maximum capacity uses optimal mesh sizes and material conditions.

Machine Weight: 73,000kg (160,934lbs) (without by-pass conveyor and magnet options)
76,000kg (167,548lbs) (with by-pass conveyor and magnet options)



TEREX® | FINLAY



Jaw Crusher J-1480